CAR WASH Door

MOUNTING OPTIONS ~
Face of Wall Mount.

MOTOR ~
Heavy duty watertight operator made exclusively for harsh environments.

VINYL ~
22 ounce puncture resistant vinyl panels heat sealed to resist rot and corrosion. Clear vision panels are standard to maintain high visibility.

TRACKS ~
Fiberglass tracks used to prevent damage caused by ice build up.

AUTOMATIC CURTAIN RESET SYSTEM ~
Fiberglass tracks incorporate maintenance free automatic reset system. Curtain is designed to automatically reset itself into the door track if accidental impact occurs.

WINDBARS ~
Fiberglass windbars are used to maintain greater strength and durability.

ALUMINUM BOTTOM PROFILE ~
Aluminum bottom profile bar and rubber edge with bottom draft seal for positive floor contact. Bendaway tabs are used in the bottom profile bar to help prevent damage by accidental impact.
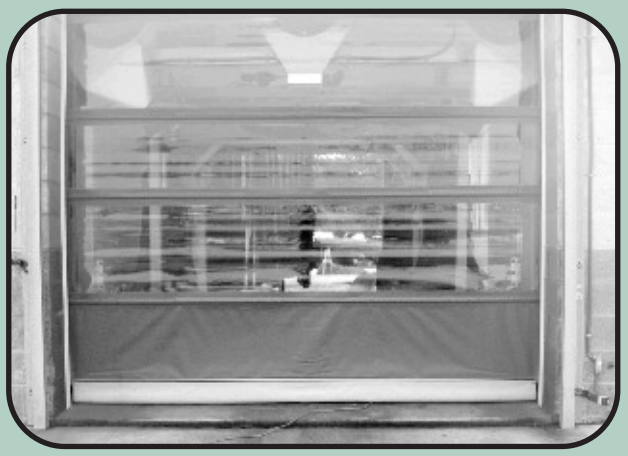
HARDWARE ~
Corrosive resistant hardware, roll tube and tracks.