



Bug Barrier®

Manual Roll-Up

WEATHERSTRIPPING ~

Grey vinyl weatherstripping is angled to provide a tighter seal preventing bugs and insects easy access or entry. Optional brush seal available.

RESET SYSTEM ~

Interlocking brush seal is incorporated at the top of the SnapTite tracks causing a reset system. Should the door be forced out of the tracks by accidental impact, the door is designed to reset back into the guides when open.

BREAKAWAY FEATURE ~

Fiberglass windbars remain flexible enough to pop out in case of accidental impact.

SCREEN ~

Standard green color, 17 x 11 high strength, vinyl coated polyester weave screen. (See options page for other screen choices.) Windbars are reinforced in yellow safety vinyl.

One year warranty on parts and workmanship.

MANUAL OPERATION ~

Heavy duty spring loaded roll tube.

Maximum size is 16' wide x 12' high.

Minimum width is 36" wide.

CHAIN HOIST OPERATION ~

Chain hoist operated roll tube with spring assist.

Maximum size is 16' wide x 16' high.

MOUNTING OPTIONS ~

Header Mount, Face of Wall, Stand-Off Bracket Mount and E-Track Mount. Unit width is critical on all header mounted doors. All Bug Barriers® are manufactured to + or - 1/8" tolerance.

HEAD ROOM ~

6" to 8" will be used header mount applications. 8" is required above the door opening for wall mount applications.


TRACKS ~

2" wide and 2" deep SnapTite aluminum tracks. Header mount will take up to 2-1/2" of side room on each side. Wall mount will take up to 6" of side room on each side. Doors 11' wide and over will require 4" deep SnapTite tracks. Optional 6" deep track for additional wind load.




Mounting Bracket (Wall Mount Only)

Track Mounting Clips (Wall Mount Only)

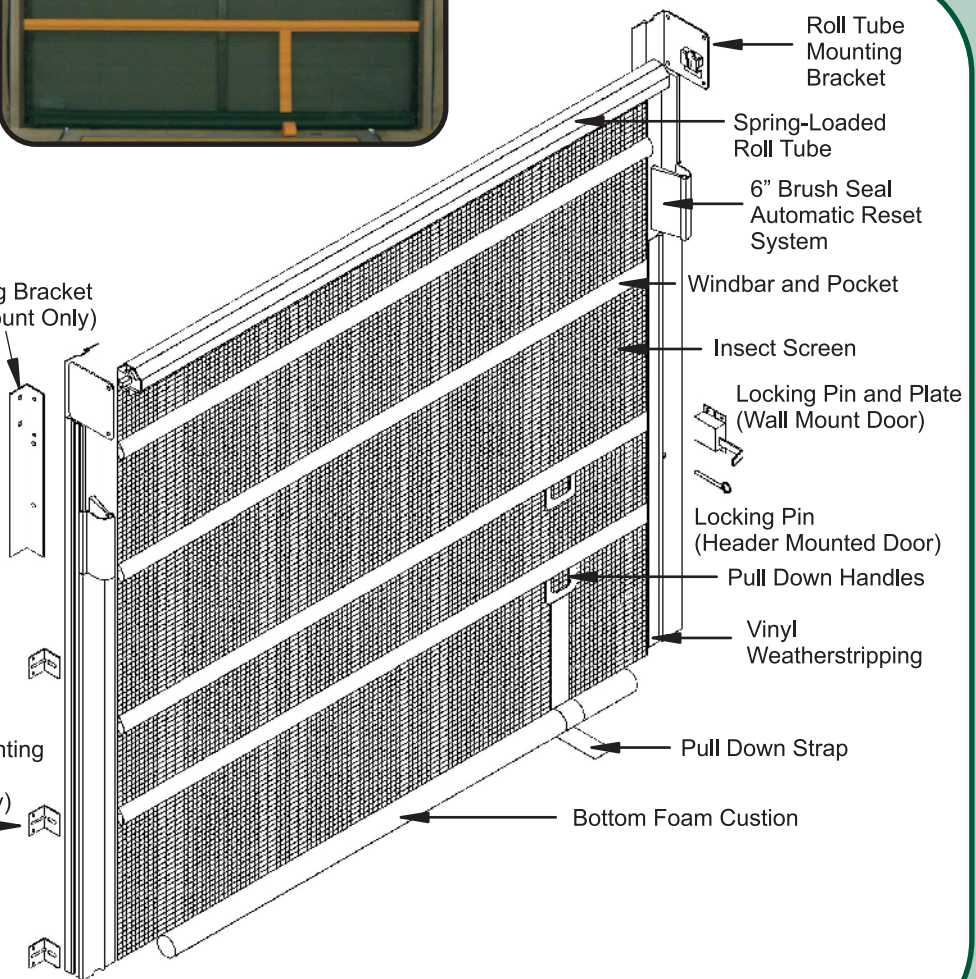

Mounting Options (See page 15 for mounting options)

Header Mount (Under Lintel) (In-Jamb)



Wall Mount (Face of Wall)

