


SURVEY SHEET

1-800-701-4782 • www.gatewayindustrial.com

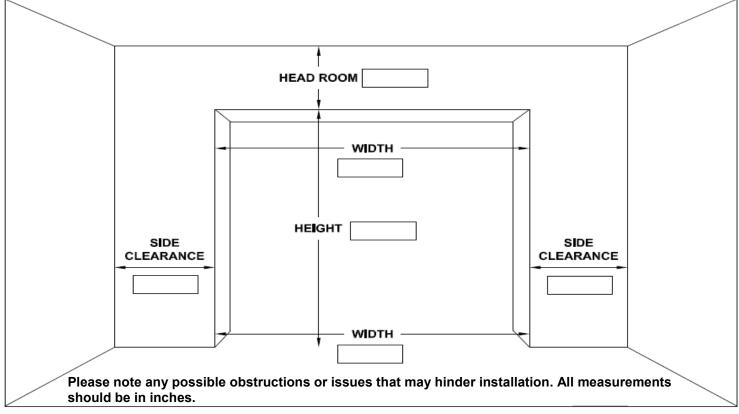

Please note any possible obstructions or issues that may hinder installation. All measurements should be in inches.		
Company: Conta	act:	
Quote: Job Name:	Phone:	
Notes:		
MATERIAL:	OPERATION:	
☐ Bug Barrier® ☐ 22oz Vinyl ☐ 40oz Vinyl	☐ Manual Spring-Loaded	
Standard Color Options: Blue, Green, Black, Yellow (Non-Standard Colors and Bird Screen Available-Please contact us for options)	☐ Chain Hoist Drive Side: □ Left □ Right	
Full Width Vision Panel (Vinyl Only)	As viewed from mounting surface.	
□ Yes □ No	☐ Internal Tube Motor	
Aluminum Hinge Windbar Option (For High Wind Load) See See 10 No	Drive Side: □ Left □ Right As viewed from mounting surface.	
MOUNTING STYLE: (If aluminum hinges are required for additional wind load head room requirement will increase to 18".)	□ External Jackshaft Motor (Requires 18" of Side Room and 18" of Head Room.) Drive Side: □ Left □ Right As viewed from mounting surface.	
☐ In Jamb (Requires 8" of Head Room and typically 8" of door width. All doors manufactured to + or - 1/8" tolerance.)	☐ Single Phase ☐ 120 Volt ☐ 240 Volt	
☐ Wall Mount (Requires 8" of Head Room and an average of 4" on each side.)	☐ Three Phase☐ 208 Volt☐ 480 Volt☐ 600 Volt	
□ Exterior Mount □ Interior Mount	☐ Watertight	